



# Tsunami.GX 90

## Wireless Point-to-Point Ethernet Bridges

### Fast, Cost-Effective Extension of IP Networks

Proxim's Tsunami™.GX is a full-duplex point-to-point wireless Ethernet bridge with an innovative split-box design. This latest generation of high-capacity wireless bridges is designed to reduce the expense of extending IP networks and to simplify installation. Secure wireless technology significantly reduces total cost of ownership and speeds deployment, while a split-box design adds installation flexibility. The Tsunami.GX also provides best-in-class system performance with native IP interfaces by eliminating the overhead associated with DS3-to-Ethernet connections.

- Perfect for data and data/voice network backhaul applications and for replacing, extending or backing up leased lines
- Indoor-only installation facilitates quick maintenance and easier upgrades
- Indoor/outdoor installation improves system gain and reduces total cost of ownership

### Easily Manage and Troubleshoot Your Wireless Network

Tsunami.GX bridges offer sophisticated, preventative management tools to simplify network maintenance and eliminate downtime. Advanced diagnostic tools identify and isolate potential issues before they impact the network.

- Standards-based SNMP management and web-based GUI simplifies remote management and integrates easily into existing software platforms
- Built-in spectrum analyzer and an alarm log facilitate RF planning and post-deployment tuning

### The Speed of DS-3 with the Ease of Ethernet

Backed by more than 20 years of wireless design innovation, Proxim's Tsunami wireless bridge family

easily and affordably enables network extension, redundancy and backhaul. Tsunami wireless bridges eliminate fiber installation costs and leased line fees to bring you the capacity of DS-3 with the TCO of Ethernet.

- High capacity for bandwidth-intensive applications such as PBX extension, data backhaul and critical link redundancy
- No expensive recurring leased line costs
- Superior system gain ensures consistent, high quality network operation

### Deploy in Days

Because Tsunami bridges operate in license-exempt ISM frequency bands, they can be deployed quickly – eliminating the long lead times associated with leasing lines or trenching new fiber optic cable. This is especially useful in network redundancy and contingency planning.

- Rapid device deployment and flexible re-deployment
- ISPs maintain business continuity, even in severe conditions
- Enterprises minimize costly business application downtime

### Reliable and Secure


A wireless alternative to a wired network yields quality as well as flexibility. Proxim's Tsunami bridges offer the highest security and reliability available in networking today.

- Over 99.999% reliable RF transmission
- Meets or exceeds wired network security
- Proprietary encryption methods ensure secure data transmission



### APPLICATIONS

- Enterprise LAN and PBX extension
- WAN connection redundancy
- ISP remote POP
- ISP direct customer connections using point-to-point
- Multipoint backhaul at DS-3 performance
- Extension of an existing fiber network

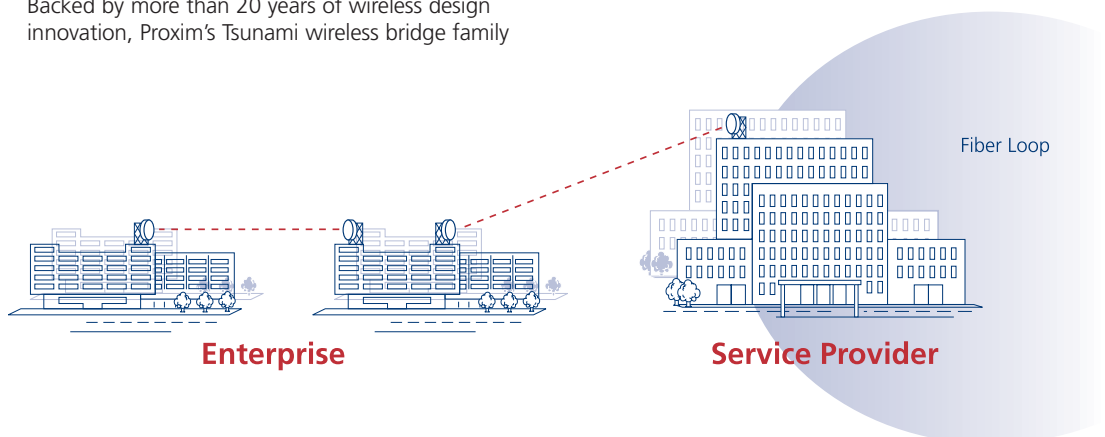

# Tsunami.GX 90 Specifications

## About Proxim

Proxim Corporation is a global leader in wireless networking equipment for Wi-Fi and broadband wireless networks. The company provides its enterprise and service provider customers with wireless solutions for the mobile enterprise, public hot spots, security and surveillance, last mile access, metropolitan area networks and voice and data backhaul.

**Proxim Corporation**  
935 Stewart Drive  
Sunnyvale, California 94085

tel: 800.229.1630  
tel: 408.731.2700  
fax: 408.731.3675  
www.proxim.com

FREQUENCY	DIGITAL CAPACITY	CHANNEL PAIRS	FCC EMISSION DESIGNATOR	THRESHOLD (BER=1X10 <sup>-9</sup> )	OUTPUT POWER	SYSTEM GAIN	DISTANCE (MILES/KM)
5725-5850 MHz	98 Mbps <sup>4</sup>	1	28M1G7D	≤-79 dBm	≥+23 dBm <sup>1</sup>	≥102 dB, 106 dB typ.	0 to >32/51 <sup>3</sup>

### SYSTEM

Configuration	Split-box: IDU, RF Unit
Modulation	DSSS; QPSK
Frequency Stability	±10 ppm
RF Attenuation Range <sup>1</sup>	≥20 dB
Maximum Receive Signal	-20 dBm error free; 0 dBm no damage
Error Floor	<10 <sup>-11</sup>
Latency (T1) <sup>2</sup> , one-way	325 µsec ±10%
Error Correction	Reed-Solomon
Security	12 character Link ID (48 bits)
Regulatory Compliance	FCC Part 15.247; IC RS210
FCC ID	HZB-US5358-GX1
Industry Canada ID	1856A-U5358GX1

### DIGITAL LINE INTERFACES

Main Data Channel <sup>4</sup>	96 Mbps aggregate 48 Mbps full duplex
10/100 Base T	RJ-45 modular jack Auto-sense MDI/MDI-X
10/100 Base FX	SC-Type, multi-mode Fiber
Compliance	IEEE 802.3
Wayside Data Channels	
T1	DSX-1 (2 each) RJ-48C modular jack

### AUXILIARY INTERFACES

Orderwire (DTMF)	RJ-11, 100 addresses
VF	8 pin modular jack, 4-wire 0dBm @ 600 ohm, balanced
Aux Data (serial)	8 pin modular jack, EIA-561 ≤19.2kbps, selectable, DCE

### FAULT AND CONFIGURATION MANAGEMENT

Network Management	SNMP v2c (MIB II, Proxim enterprise MIBs), embedded HTML server, Telnet, VT-100 terminal
Far End Management	Via NMS (embedded router, gateway address, subnet mask), front panel display
Interfaces	
NMS 1	10/100BaseT, RJ-45, auto-sense
NMS 2	10/100BaseT, RJ-45, auto-sense
Configuration (serial)	EIA-574, 9600bps, 9-pin Sub-D, DTE
External Alarm Interface	
Connector	9-pin Sub-D female
Outputs	2 Form C Relays (Major, Minor)
Inputs	2 TTL with internal pull-ups

<sup>1</sup> Output power is specified at zero attenuation

<sup>2</sup> Does not include air latency of approximately 5.4 µsec/mile

<sup>3</sup> RF Unit installed outdoors with 6ft. parabolic antenna, 99.995% one-way availability, average climate/terrain, no multipath reflection. Assumes FCC regulations for EIRP

<sup>4</sup> No Waysides enabled

### POWER/ENVIRONMENT

Input Voltage Range	-20 to -60 Vdc or +20 to +60 Vdc
Power Consumption	<70 Watts
Power Connector	3-pin terminal block
Operating Temperature	
IDU	0°C to +50°C
RF Unit	-30°C to +55°C
Humidity	
IDU	95%, non-condensing
RF Unit	100%, condensing
Altitude	up to 15,000 ft/5000 m
Wind Loading (RF unit)	up to 110 mph/96 kts
MTBF IDU	>100,000 Hours
MTBF RF Unit	>100,000 Hours

### PHYSICAL DIMENSIONS

	IDU	RF Unit
Size (in/cm)	17.2 X 10.9 X 1.72/ 43.6 X 27.6 X 4.4	14.1 X 10.9 X 1.72/ 35.8 X 27.6 X 4.4
Weight (lbs/kg)	6.5/2.9	12.0/5.4

### MECHANICAL

RF Unit	
Antenna Port (outdoor RF cable not provided)	Type-N female
IDU Port	TNC female
Cable to IDU	LMR-240 or equiv. <100m; LMR-400 or equiv. <300m
Mounting	
IDU	EIA rackmount, 19" or 23", 1RU
RF Unit	EIA rackmount, 19" or 23", 1RU, or outdoor pole mount bracket (optional)

### SELECTABLE FREQUENCY CHANNEL PAIR

Channel Plan A	5745/5830 MHz
----------------	---------------

### ORDERING INFORMATION

67254	Low Band Terminal, 301-57710-61H0
67255	High Band Terminal, 301-57710-61L0
ACC-GX-RF-2	Optional RF Unit Outdoor Mounting Kit
201-31075-1	Optional AC Adapter 110/220 VAC with cable and connector
Call for details	ServPak 24x7 Enhanced Service and Support contracts (1yr-3yr)

### SHIPPING CONFIGURATION

Tsunami.GX 90 IDU (Indoor Unit)
ISM Low Band or High Band RF Unit
IDU Indoor Rack
ACC-GX-RF-1 RF Unit Indoor Mounting Kit (includes 12" IDU to RFU TNC-to-TNC cable)
Quick Install Guide
CD-User Documentation